

## DATASHEET

# eSolarMark Light PET CO2 Laser Coding System

The Matthews eSolarMark Light CO2 laser coding systems are ideal for coding a high quality, contrasting mark onto PET materials, such as beverage containers. Also ideal for glass substrates, and cleanly marks alphanumeric text, date and time codes, serial numbers, barcodes, 2D codes and graphics.

Matthews' laser coding systems provide many interface options to connect to remote devices such as PLCs, packaging equipment, and material handling equipment. Our lasers have the greatest focal distance, allowing the laser to be mounted farther away from production lines. There are three control interface models (network, or 10.4" color touchscreen) and Matthews provides MPERIA® message design software with every laser system purchased.

### eSolarMark Light – 9.3m Wavelength

#### Laser Output Power

- 20W, 50W

#### Electrical Requirements

- 115V 60Hz/230V 50Hz (auto adjustable)

#### Power Consumption

- 20W = 600W/50W = 1000W

#### Cooling

- **Integrated Fans:** at ambient temperature 41–104°F (5–40°C)  
Up to 100% of laser duty cycle
- **Water:** at ambient temperature 104–113°F (40–45°C) (IP65)  
Or in dirty, dusty, humid environment

#### Operating Environment

- Ambient temperature 41–113°F (5–45°C)
- Humidity up to 80% non-condensing

#### Enclosure Type

- IP52, NEMA 12/IP65, NEMA 4 (optional)

#### Dimensions and Weight

- **Control Unit:** 13.2" L x 14.2" W x 6.3" H  
(335mm L x 4360mm W x 160mm H)  
18lb. (8kg)
- **Marking Unit:** 28.5" L x 5.5" W x 5.5" H  
(726mm L x 140mm W x 140mm H)  
29lb. (13kg)

#### FEATURES

- + Vector quality, contrasting codes onto PET material and glass substrates
- + Permanent coding of text, date and time codes, serial numbers, barcodes and 2D codes, and graphics
- + Optional IP65 rated enclosure for washdown environments
- + Laser coding requires no ink/solvent consumables for a lower overall cost of ownership
- + Clean and eco-friendly coding system



**Communication**

- + USB/RS232/Ethernet 10 Base T
- + Input/output connector for: system interlocks, remote start/stop, ready, marking, status signals, and remote key switch connection
- + SolMark II job edition software available for Windows XP, Windows 7


**Languages**

- + Language versions:
 


English	Italian
Chinese	Dutch
French	Polish
German	Swedish
Spanish	Portuguese

**Options**

- + Multiple user interface options (network, touchscreen)
- + IP65 enclosure
- + Scanning head mounting extension modules
- + Product detector and shaft encoder
- + Chiller for water-cooled systems (IP65)
- + Red laser pointer for marking position preview

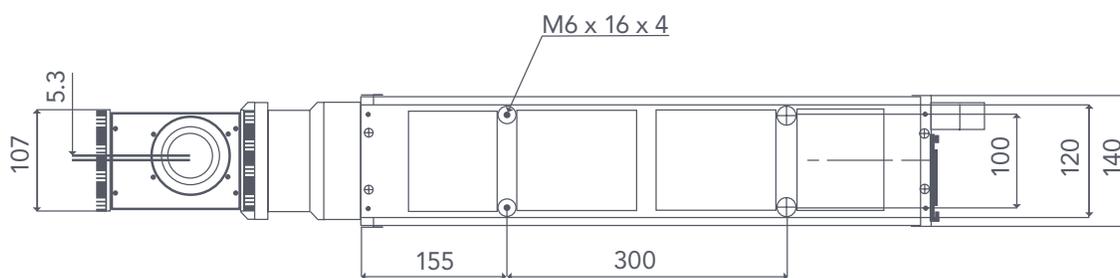

**BOTTOM VIEW**

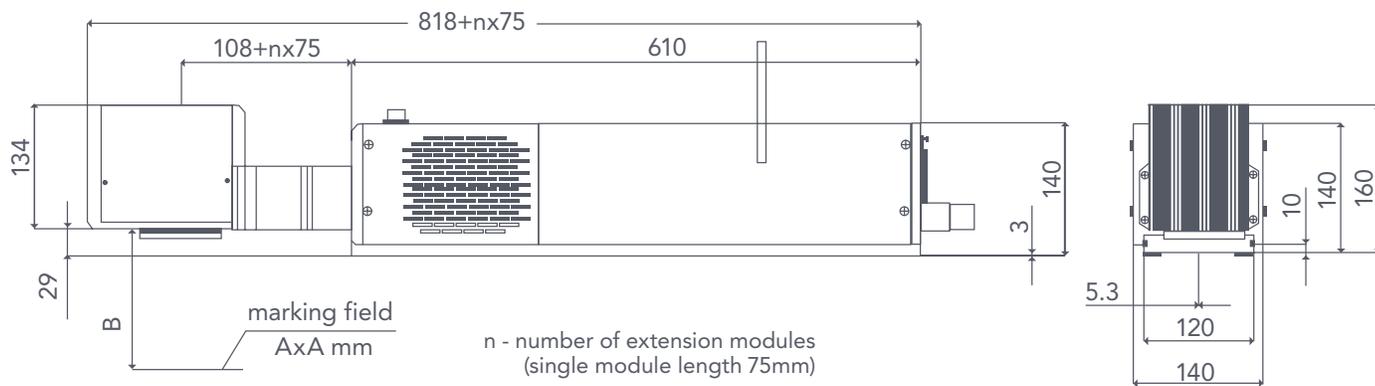

All dimensions specified in millimeters unless otherwise noted.

